
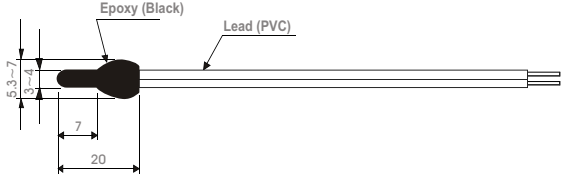
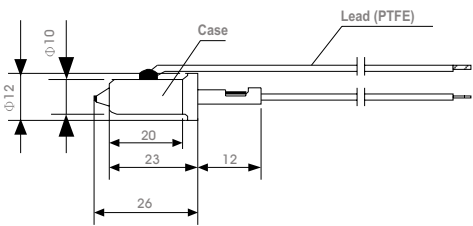
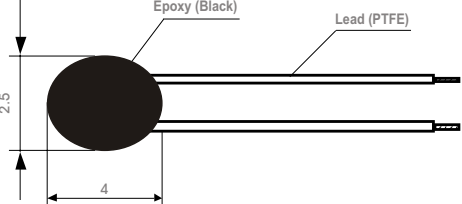
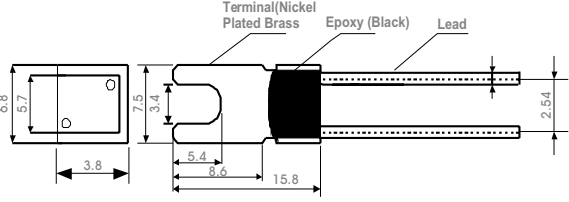


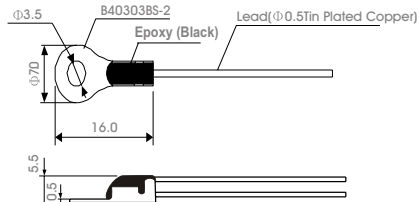

AUTOMOTIVE

<p>1.SA Type Unit: mm</p> 	<p>Operating temp. range</p> <p>-20~+70°C</p>	<p>Dielectric strength</p> <p>1500V AC for one sec</p>
<p>2.SB Type Unit: mm</p> 	<p>Operating temp. range</p> <p>-10~+60°C</p>	<p>Operation Voltage</p> <p>12V DC</p>
<p>3.SC Type Unit: mm</p> 	<p>Operating temp. range</p> <p>-20~+125°C</p>	<p>Dielectric strength</p> <p>1000V AC for one sec</p>
<p>4.SD Type Unit: mm</p> 	<p>Operating temp. range</p> <p>-20~+100°C</p>	<p>Dielectric strength</p> <p>1500V AC for one sec</p>
<p>5.SE Type Unit: mm</p> 	<p>Operating temp. range</p> <p>-20~+100°C</p>	<p>Dielectric strength</p> <p>1500V AC for one sec</p>
		<p>Dissipation constant</p> <p>MIN.5 mW/°C</p>
		<p>Thermal time constant</p> <p>MAX.35 sec</p>
		<p>Moisture resistance</p> <p>(40°C 95% RH) 1000hours</p>